

# LAN Cable

pro series

## Part No: UTPL6JF

**Description** Solid 23AWG PACW, UTP, 4Pairs, Cross-web Separator, PE Insulation, Water Resistant Flooding Compound, PE Sheath.

**Applicable Standards** UL444, TIA/EIA 568 C.2, AS/ACIF S008, IEC60794-1-2-F5B

**Suitable Applications** For communication network applications including needing up to gigabit networking speeds.

### Images

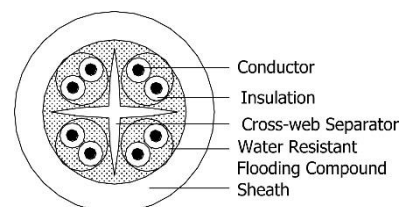


Image for illustration purposes only.



### Construction

<b>Conductor</b>	Material	PACW
	Size	23 AWG
	Stranding	1/0.57
	Area	0.255 mm <sup>2</sup>
	Diameter	0.57mm
<b>Insulation</b>	Pairs	4
	Material	PE
	Colour	Blue/White-Blue Stripe, Green/White-Green Stripe, Orange/White-Orange Stripe, Brown/White-Brown Stripe.
	Nominal Thickness (mm)	0.2
	Nominal OD (mm)	1.0
<b>Filler</b>	Material	Cross-web Separator
	Material	Water Resistant Flooding Compound
<b>Sheath</b>	Material	PE (UV Stabilized)
	Colour	Black
	Nominal Thickness (mm)	1.0
	Nominal OD (mm)	7.3

Garland's Pro Series range is the experts' choice for high quality cables.

UTPL6JF-210427

# LAN Cable

pro series

DISTRIBUTED BY



Electrical Properties	Max. Conductor DC Resistance @ 20°C	73.16Ω/km
	Max. DC Conductor resistance unbalanced	5%
	Nominal Velocity of Propagation	64%
	Characteristic Impedance(1-250MHz)	100±15Ω
	Nom. Mutual Capacitance @ 1KHz	56 pF/m
	Max. Capacitance Unbalance @ 20°C	330 pF/100m
	Max. Propagation Delay Skew	45 ns/100m
	Voltage Test: Core to core	1.5 kV ac/1min
	Voltage Test : Core to Sheath	3.0 kV ac/1min

Transmission Properties	Freq. (MHz)	Min. RL (dB/100m, 20°C)	Max. IL (dB/100m, 20°C)	Min. NEXT (dB/100m, 20°C)	Min. PSNEXT (dB/100m, 20°C)	Min. ACRFEXT (dB/100m, 20°C)	Min. PS ACRFEXT (dB/100m, 20°C)	Max. PD (ns/100m, 20°C)
		1.0	20	2.03	74.3	72.3	67.8	64.8
	4.0	23.01	3.78	65.27	62.27	55.76	52.76	-----
	8.0	24.52	5.32	60.75	58.75	49.74	46.74	-----
	10.0	25.0	5.95	59.3	57.3	47.8	44.8	545
	16.0	25.0	7.55	56.24	54.24	43.72	40.72	-----
	20.0	25.0	8.47	54.78	52.78	41.78	38.78	-----
	25.0	24.32	9.5	53.33	51.33	39.84	36.84	-----
	31.25	23.64	10.67	51.88	49.88	37.9	34.9	-----
	62.5	21.54	15.38	47.36	45.36	31.88	28.5	-----
	100	21.11	19.8	44.3	42.3	27.8	24.8	538
	155	21.0	-----	-----	-----	-----	-----	-----
	200	18.0	28.98	39.78	37.78	21.78	18.78	-----
	250	17.32	32.85	38.33	36.33	19.84	16.84	536

Garland's Pro Series range is the experts' choice for high quality cables.



With Garland, you are always well connected  
Sales Enquiries 1800 66 99 99

www.garlandcables.com.au

UTPL6JF-210427

# LAN Cable

pro series

<b>Mechanical Properties</b>	<b>Operating Temperature Range</b>	-25 to 70°C
	<b>Max. Recommended Pulling Tension</b>	140N
	<b>Min. Bend Radius (install)</b>	75mm
	<b>Approximate Mass</b>	5.6 kg/100m

<b>Supply Information</b>	Part Number	Colour	Pack Size	Pack Type	Dimensions
	UTPL6JFBK305	Black	305m	Wooden Reel	F36 x W26 cm

- Madison reserves the right to make changes to the products described in this specification without prior notice
- All values subject to factory tolerances

Garland's Pro Series range is the experts' choice for high quality cables.